



The information contained herein is proprietary and confidential. It may not be reproduced, used, or disclosed without prior written consent by QUARTZDYNE, INC.

REV	ECO	INITL	DESCRIPTION	DATE
E0	943	LJP	Bright finish	17May04

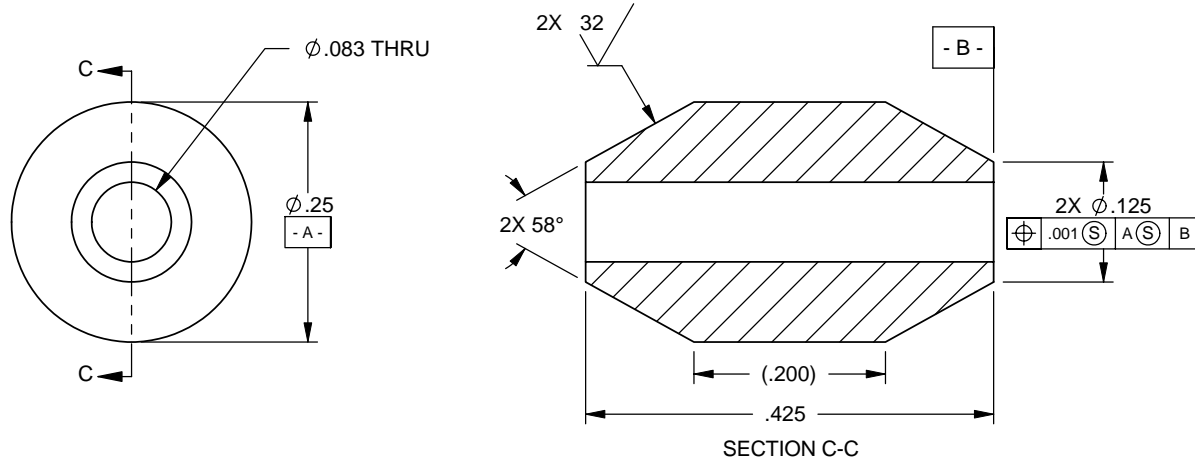

<p>UNLESS OTHERWISE SPECIFIED:                  ·DIMENSIONS ARE IN INCHES. GENERAL TOLERANCES:                  DECIMAL: .XX = <math>\pm .01</math> .XXX = <math>\pm .005</math>, ANGULAR <math>\pm 1^\circ</math>                  ·PARENTHEICAL INFORMATION IS REFERENCE ONLY.                  ·DIMENSIONAL LIMITS APPLY AFTER PROCESSES.                  ·REMOVE ALL BURRS AND SHARP EDGES, R .015 MAX.                  ·PARTS SHALL BE FREE OF OILS AND CONTAMINANTS.                  ·FILLET RADII ARE .016 MAXIMUM.                  ·APPLICABLE STANDARDS AND SPECIFICATIONS:                  ANSI Y14.5M-1982 DIMENSIONING &amp; TOLERANCING                  ·SURFACE FINISH: 125 <math>\mu</math>" AA OR BETTER</p>	PART NUMBER: <b>D21078-01</b>	REVISION: <b>E0</b>	 Quartzdyne, Inc. 1020 Atherton Drive Salt Lake City, Utah 84123, U.S.A. Tel 801.266.6958; Fax 801.266.7985 <a href="http://www.quartzdyne.com/">http://www.quartzdyne.com/</a>
	DRAWING NUMBER: <b>D21078</b>	REVISION: <b>E0</b>	
	MATERIAL SPECIFICATION: <b>AMS 5666</b>	NOTES: -	
	NOMENCLATURE OR DESCRIPTION: <b>Inconel 625</b>		
SCALE: <b>5:1</b> DO NOT SCALE		SHEET <b>1</b> of <b>1</b>	TITLE: <b>Sealing Cone</b> -

**Notes:**  
 1. Bright finish is required; do not tumble debur.