


Connector Pinout:
 V = Supply, VDC (Blue)
 G = Ground (Black)
 SCL = Clock (Slate/Grey)
 SDA = Data (Green)
 ----- Inside Transducer -----
 A1/T = Address 1 (Yellow)
 A2/P = Address 2 (Purple)
 R = Reference (White)
White wire may or may not be present

If the connector is removed, output wires are approx. 4" [100mm] long 26-28 AWG, TFE Insulation




Part Number: DXB315-xx-yyy
© 2011 Quartzdyne, Inc.
Mar. 14, 2011

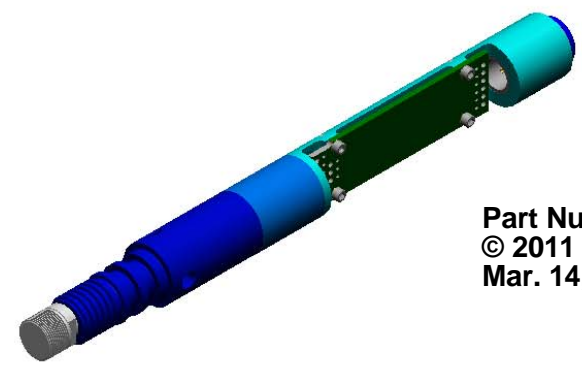

Mechanical Specifications for "Tubeless" DXB315 Transducers

Proof Pressure30,000 psi [2070 bar]
 Overpressure without Sensor Damage.....varies with temperature; see plot below
 Pressure Mediaparticle-free fluid compatible with Inconel 625 and MP35N
 Mechanical Shock 500 g, 2 ms half-sine
 Vibration.....survives random vibration per NAVMAT P-9492 3.2.1
 Weight..... 11.5 oz [326 g]

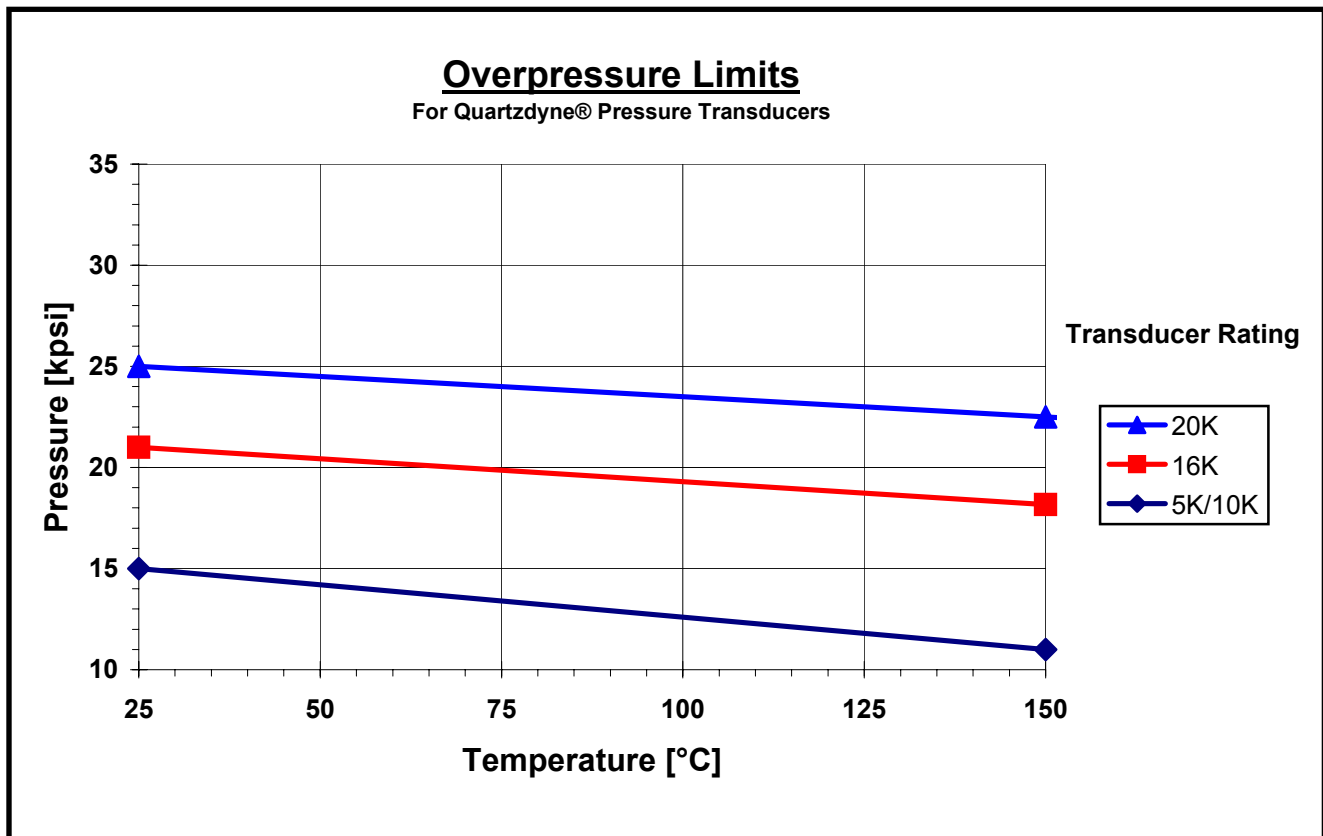

Technical Notes for 3/4-inch "Tubeless" Transducers

This transducer has been designed for tools larger than Ø.75 inch [19mm] with maximum ruggedness in mind. Unlike other transducers manufactured by Quartzdyne, there is no circuit tube to protect the circuit: it is open and accessible. Please take necessary precautions to protect it. When designing this transducer into your tool, please consider the following items:

1. The Fischer connector may be removed by gripping it and the bushing firmly with pliers and unscrewing it. Follow proper ESD precautions.
2. If you plan to thread a stud into the end of the circuit carrier (7/16-20 or 5/8-24 threads), allow for a 0.125 inch [3.2mm] minimum clearance hole for the output wires. The edges of this hole should be generously rounded to prevent insulation damage, and we recommend insulating the bundle in a piece of tubing (i.e., FEP Teflon heat shrink.)